



FEATURES:-

- ✓ Composite algorithm system with high speed operating.
- ✓ Embedded LINUX system, easy to integrate in to various system
- ✓ Standalone or network environment
- ✓ Professional access control system support real-time entrance logs transferring
- ✓ 24 hours continuous operation available
- ✓ Saves power during power outage
- ✓ With Strong seal appearance, anti-dust

ORDER INFORMATION :-



EM type

Model : AY-F08+ID FINGERPRINT/ PIN/ EM CARD WITH LCD

Mifare type

Model : AY-F08+M1 FINGERPRINT/ PIN/ MIFARE CARD WITH LCD

HID type


Model : AY-F08+HID FINGERPRINT/ PIN/ HID CARD WITH LCD




Copyright FALCO™. All rights reserved.



Standalone

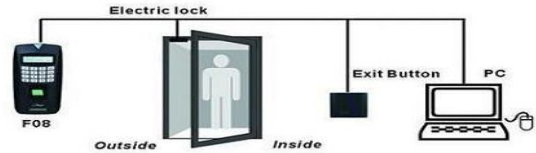

Network

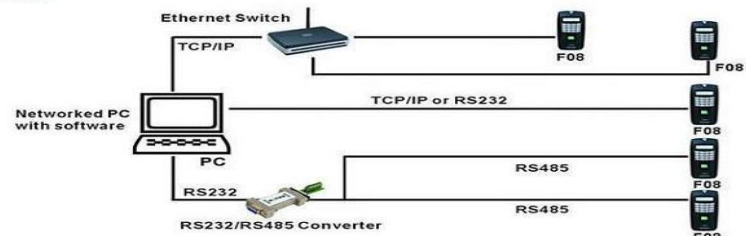

SPECIFICATION:-

LCD display	4 lines character with LCD 128*64
Speaker	Voice prompt (language can be selected)
Fingerprint/ log capacity	3k fingerprints, 10k cards/ 10k transactions
Card Format	Optional for EM/ Mifare/ HID 125kHz
Identification speed (1:N)	≤1s
Verification speed (1:1)	≤0.5s
FAR	≤0.0001%
FRR	≤0.01%
Attendance status	Check in, check out
Communication	TCP/IP, RS232/485, USB Host Client, Wiegand in/out
Power	110/ 220VAC ~ 12VDC
Language	Multi language, English, French, Spanish, Arabic, etc., more than 15 languages can be selected
Operation temperature	0°C ~ 45°C
Operation humidity	20% ~ 80%
Machine size	210(L) * 95.5(W) * 46.5(H)mm

